

DATA SHEET


CAM SWITCH

8pole CHO Switch




ELECTRICAL DATA-According to IEC 60947-3

Thermal current I _{th}	12A
Rated impulse withstand voltage U _{imp}	4KV
Rated insulation voltage U _i	500V
AC Rated operational current I_e	
AC-21A 415V, 690V	6A
AC-22A 415V, 690V	9A
Ac-23A 415V	6A
Breaking capacity (400V PF -0.35-0.45)	48A
Rated short time withstand current(1sec) rms	-
Rated conditional short circuit current rms	3KA
Max fuse rating gL	6A
Mechanical operation in millions	1
Rigid copper cable connecting capacity	0.7-1.5
Flexible copper cable connecting capacity	0.7-1.5

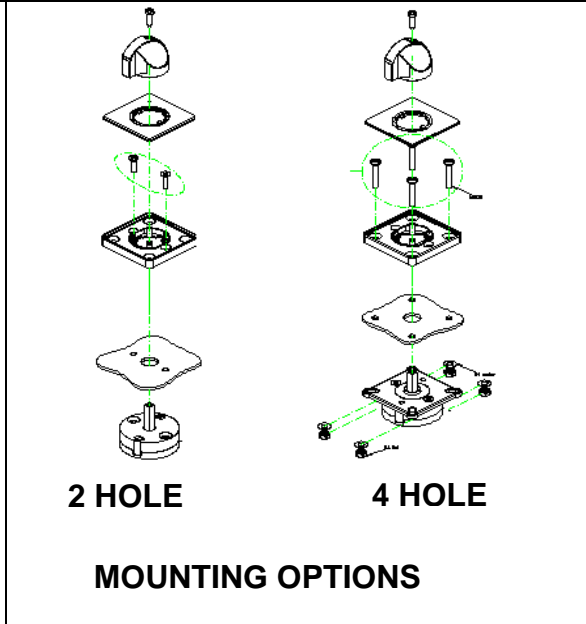

DIMENSIONS

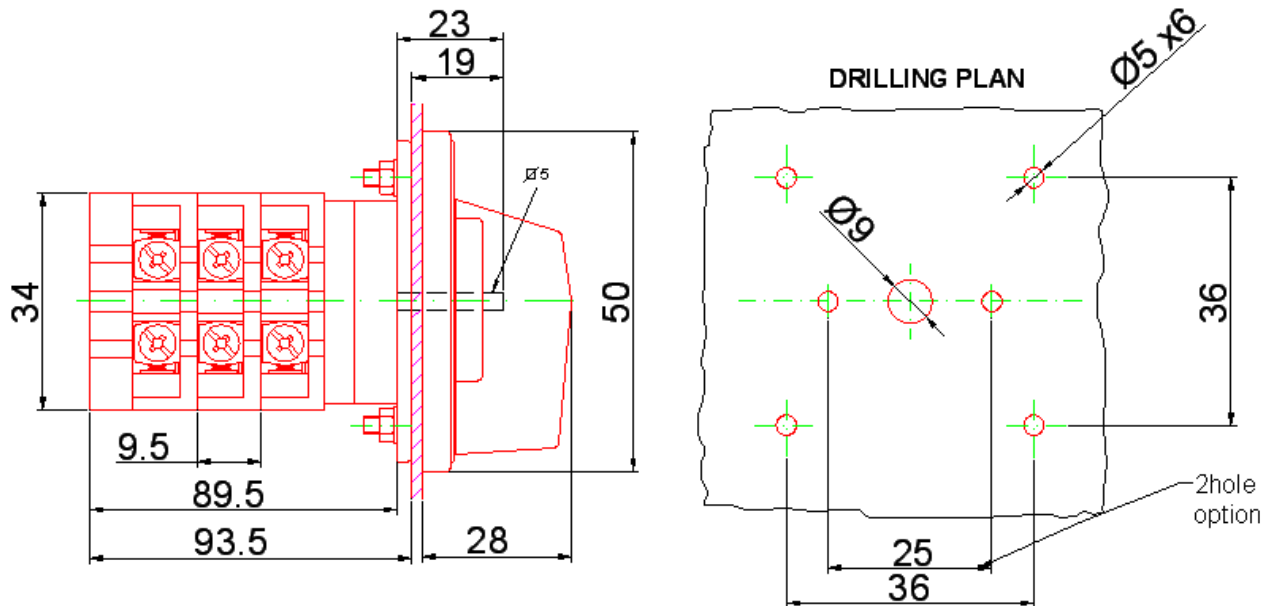

CODE : T-0006400-8ENRD14

Description: 8P CHO RED 1-0-2 12H 6A 400-8 -190

Touch proof (IP 20) : Optional
UL Switches : On request